



330~355W

AS330-335P-72


MORE POWER


UP TO 18.30% Maximize the light absorption area, module efficiency up to 18.30 %.


 Low temperature coefficient (Pmax): -0.35 % /°C.


 Better shading tolerance.


MORE RELIABLE


 Lower internal current, lower hot spot temperature.


 Cell crack risk limited in small region, enhance the module reliability.

 Heavy snow load up to 5400 Pa, wind load up to 2400 Pa.

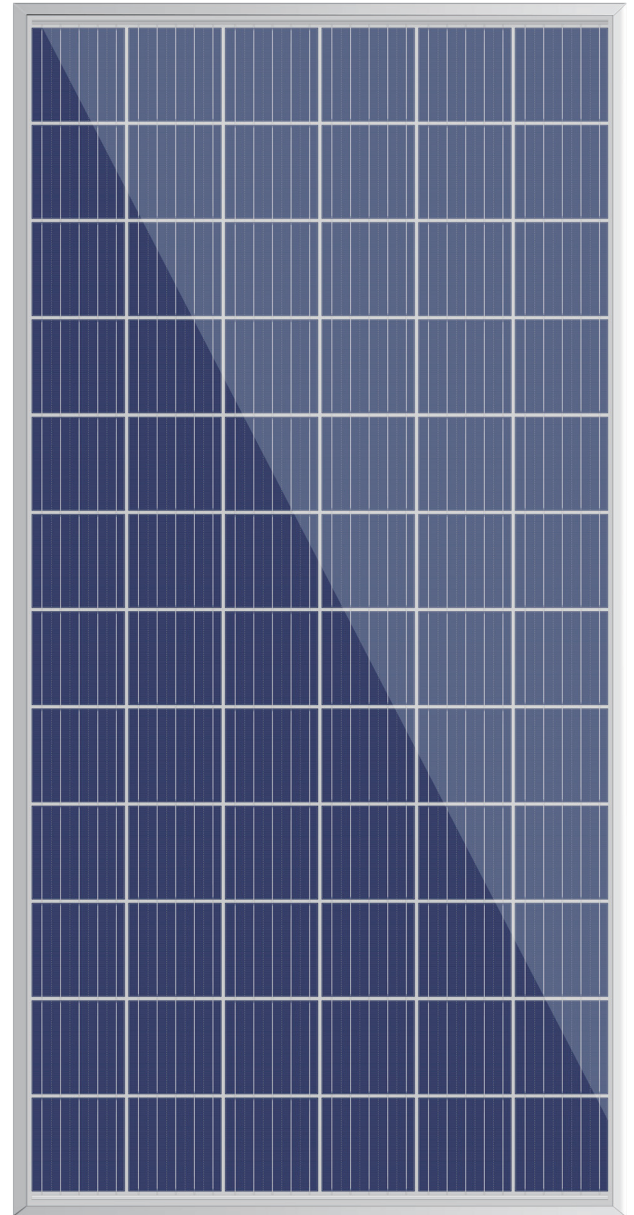

 **12** 12-year Product Warranty

 **25** 25-year Linear Performance Warranty

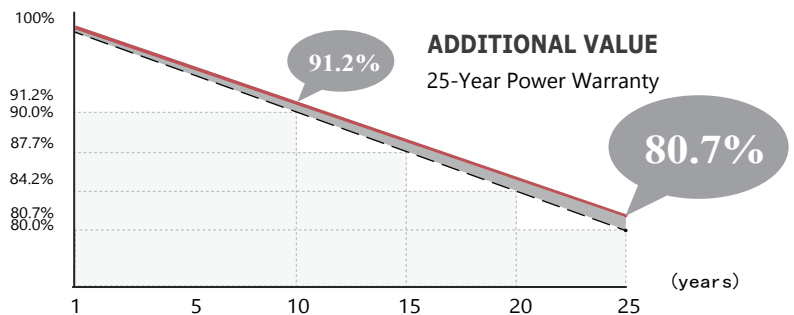

AS330-355P-72

330-355W


Full-Cell High Efficiency PV Module

Weight
20.5kgs±3%

Cells Type
Poly-crystalline 156.75×156.75mm

Dimension(LxWxT)
1956±2mmx992±2mmx35±1mm

Packaging
31pcs/pallet, 804pcs/40HQ container
31pcs/pallet, 310pcs/20GP container

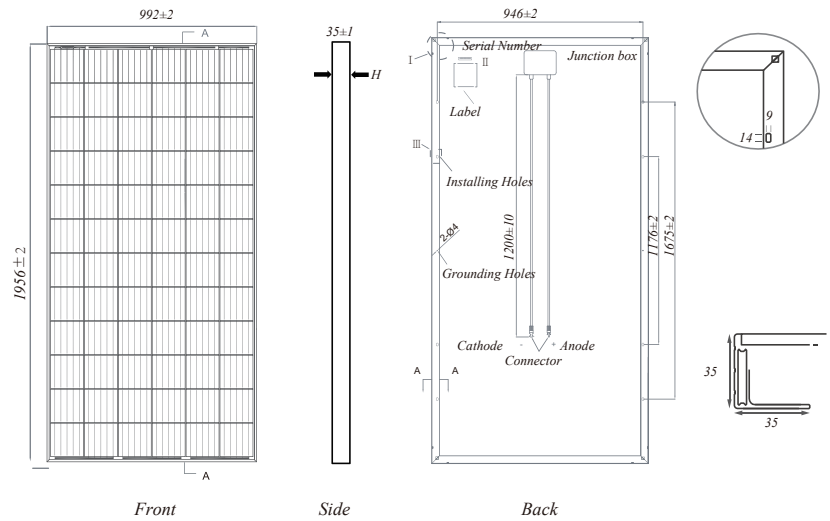

Remark: customized frame color and cable length available upon request

MECHANICAL SPECIFICATION

No.of cells	72(6x12)
Front Glass	3.2mm, High Transmission, Low Iron, ARC Tempered Glass
Frame	Anodized Aluminium Alloy
Output Cables	4.0mm, Length:1200mm
Junction Box	IP67 Rated
Connector	MC4 Compatible
Hailstone Impact Test	80Km/h for 25mm ice ball

OPERATING PARAMETERS

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse	15A
Maximum StaticLoad,Front	5400Pa(112lb/ft²)
Maximum StaticLoad,Back	2400Pa(50lb/ft²)
Norminal Operating Cell Temperature(NOCT)	45±2°C

ELECTRICAL CHARACTERISTICS

STC:AM1.5 1000W/m² 25 C NOCT:AM1.5 800W/m² 20 C 1m/s Test uncertainty for Pmax ±3%

Module Type	AS330P-72		AS335P-72		AS340P-72		AS345P-72		AS350P-72		AS355P-72	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	330	247.1	335	250.8	340	254.5	345	258.3	350	262.0	355	265.8
Open Circuit Voltage(Voc/V)	45.5	43.27	46.23	43.3	46.62	43.66	46.86	43.89	47.43	44.42	47.62	44.6
Short Circuit Current(Isc/A)	9.22	7.55	9.37	7.57	9.41	7.6	9.5	7.68	9.58	7.74	9.62	7.77
Voltage at Maximum Power(Vmp/V)	37.8	34.5	38.29	34.95	38.55	35.32	38.76	35.5	38.97	35.71	39.22	36.07
Current at Maximum Power(Imp/A)	8.73	7.16	8.75	7.18	8.82	7.21	8.9	7.28	8.98	7.34	9.05	7.37
Module Efficiency(%)	17.01%		17.26%		17.52%		17.78%		18.04%		18.30%	

TEMPERATURE RATINGS

Norminal Operating Cell Temperature(NOCT)	45±2 C
Temperature Coefficient of Isc	+0.050%/C
Temperature Coefficient of Voc	-0.270%/C
Temperature Coefficient of Pmax	-0.350%/C

I-V CURVE(AS330-335P-72)

