

465-490W

Full Black Half-Cell PV Module

Weight

23kgs±3%

Cells Type


Mono 182x91mm

Dimension(LxWxT)

1910±2mmx1134±2mmx30/35±1mm

Packaging

36pcs/pallet, 360pcs/20GP;864pcs/40HQ(30mm)

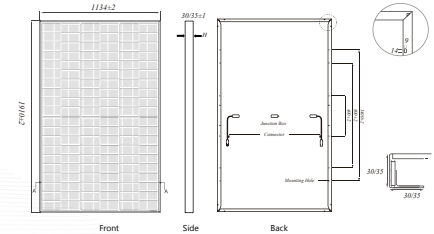

Remark: customized frame color and cable length available upon request

MECHANICAL SPECIFICATION

Cell	N-type TOPCon Mono
No. of cells	120(6x20)
Cable Length	300mm(+/-)300mm(-)
Cable Cross Section Size	4mm ² (IEC)
Junction Box	IP68
Connector	MC4 Compatible

OPERATING PARAMETERS

Maximum System Voltage	1500VDC
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	30A
Maximum StaticLoad.Front	5400Pa(112lb/ft ²)
Maximum StaticLoad.Back	2400Pa(50lb/ft ²)
Safety Class	Class II

ELECTRICAL CHARACTERISTICS STCAM1.5 1000W/m² 25°C NOCT-AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax ±3%


Module Type	AS465M10-120		AS470M10-120		AS475M10-120		AS480M10-120		AS485M10-120		AS490M10-120	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	465	355.3	470	359.1	475	362.9	480	366.7	485	370.5	490	374.3
Open Circuit Voltage(Voc/V)	43.84	37.50	43.96	37.60	44.08	37.70	44.20	37.80	44.32	37.90	44.44	40.00
Short Circuit Current(Isc/A)	13.48	11.91	13.54	11.97	13.60	12.03	13.66	12.09	13.72	12.15	13.78	12.21
Voltage at Maximum Power(Vmp/V)	35.70	31.60	35.90	31.80	36.10	32.00	36.30	32.20	36.50	32.40	36.70	32.60
Current at Maximum Power(Imp/A)	13.03	11.38	13.10	11.45	13.16	11.52	13.23	11.59	13.29	11.66	13.35	11.73
Module Efficiency(%)	21.47	21.70	21.93	22.16	22.39	22.62						

TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.29%/°C

*Specs are subject to change without further notification

I-V CURVE(AS465-490M10-120)



465~490W

AS465-490M10-120 Full Black


N-TYPE TOPCON module could increase power generation by 3%+ per watt compared with PERC

LOWER DEGRADATION RATE
First-year ≤1%, 2-30 year ≤0.4%

COMPATIBLE with mainstream trackers effective product for utility power plant

Lower degradation rate, **BETTER** shading tolerance
First-year ≤1%, 2-30 year ≤0.4%

LOWER Temp. COEFFICIENT
More power generation under high-temperature



Amosolar Co.,Ltd

Add: Flat/RM 803 Chevalier House 45-51 Chatham Road South Tsim Sha Tsui, KL, HK
Sales Center: No.210, Qianshan Road, Shuzhan District, Hefei, Anhui, China
Web: www.amosolarpv.com / amosolar.en.alibaba.com Email: info@amosolar.com

SCAN CODE TO
Learn more solar solution

