


One Hub For All Your Needs

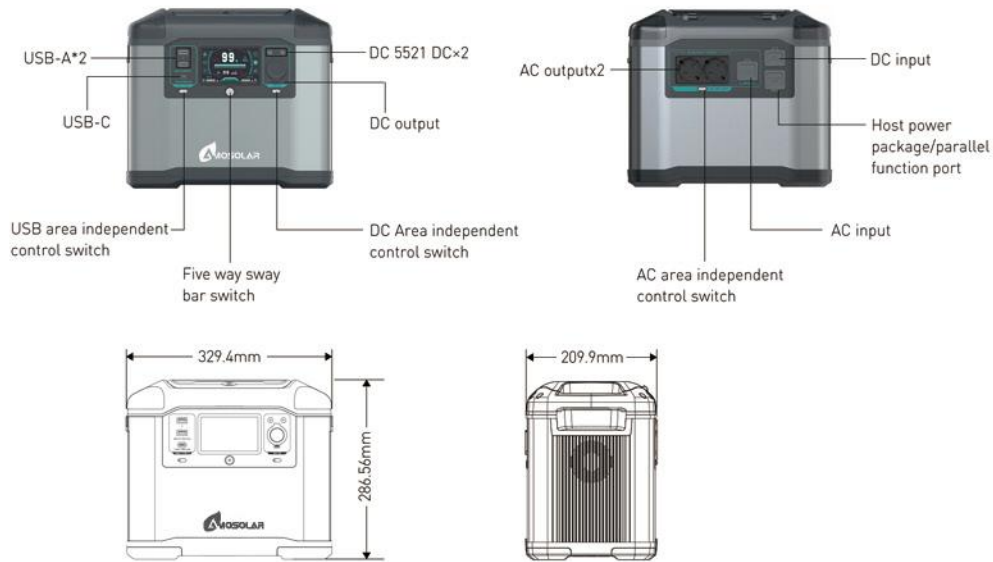

SPECIFICATIONS

AMO Technical parameters

Model:	AMO 1500W	Capacity:	1008Wh 50.4V
AC Output (x2):	1500W AC Output Socket	AC Charger Input Power:	Charge 940W Max
USB-C Output (x1):	5V/9V/12V/15V/20V 5A100W Max	Solar Charge Input:	10V-40V 8A 300W MAX
USB-A Output (x2):	5V/9V/12V 24W MAX	AC Charger Input Voltage:	220~240 VAC
DC 5521 Output (x2):	13.6V 3A	PACK:	14S8P,(2.5Ah*3.6V)*(14*8)
Cigarette lighter :	136W 13.6V 10A MAX	Life Span:	800 Cycles 80%
Discharge Temperature:	-20°C ~ 60°C	Cell Type:	NCM 18650
Charge Temperature:	0°C - 45°C	Package Size:	41.8X27.8X37.8cm
		G.W:	14kg

Amosolar Co.,Ltd

Address: No.210, Qianshan Road, Shushan District, Hefei City, Anhui Province,China

Tel: +86 13956933621

Email: info@amo-solar.com

Web: www.amosolarpv.com




UN38.3




Your EXPERT Portable Power Station

Powerful Capacity & Output


1500W Power Output

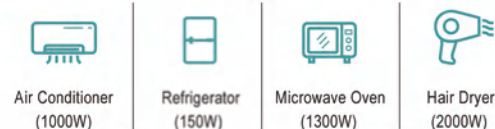


The Most Versatile Ports

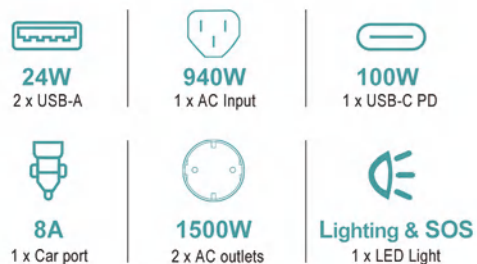

The Fastest Charging Speed

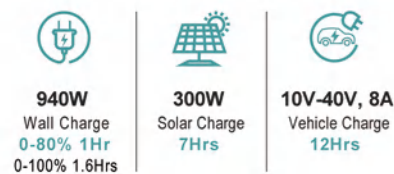

Available plugs

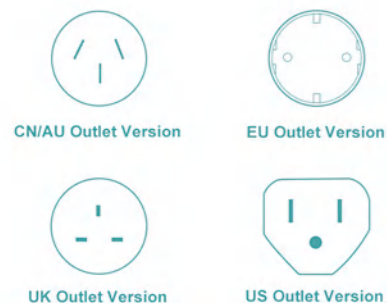

Power Wherever You Need



Outdoor Adventure

For campers, explorers, RV dwellers



Home & Emergency Backup

For professionals and emergency preppers

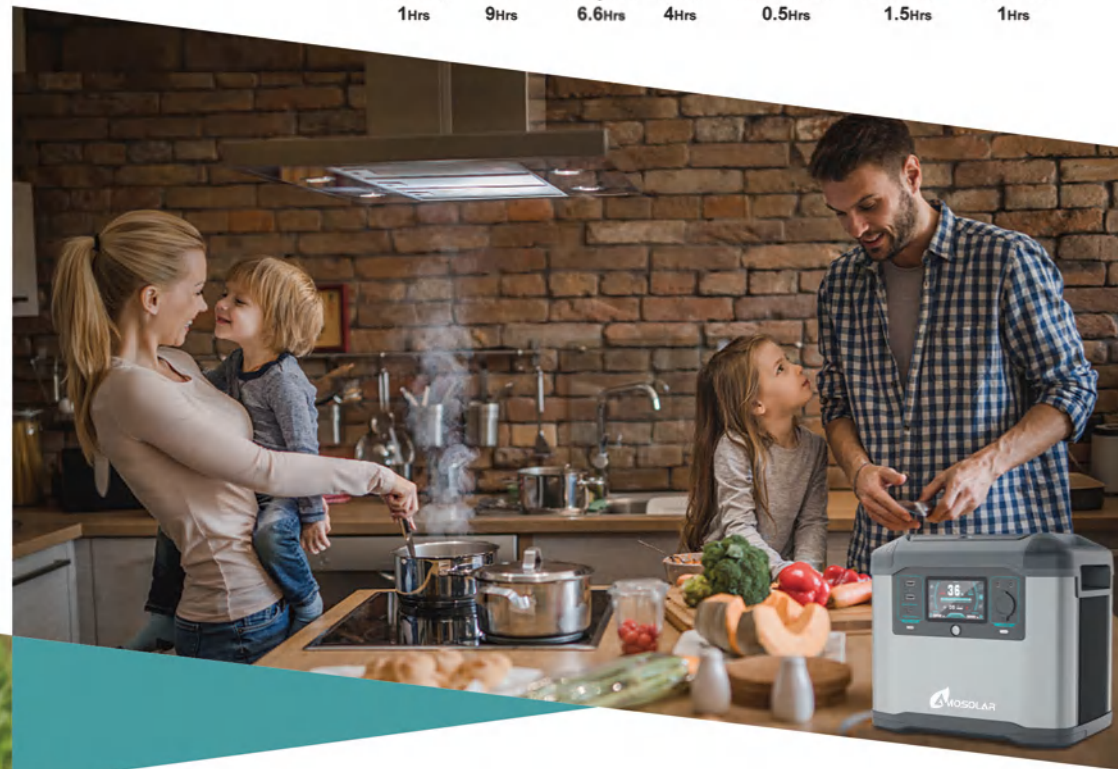

What's In Box

